




RADIANT
HEATING SYSTEMS
THERMAL ZONE VALVE

SELL SHEET

Uponor Thermal Zone Valve

Uponor is now offering a new Thermal Zone Valve, four-wire (A3011075) which will replace the 3/4" Thermal Zone Valve, four-wire (A3010525) and 1" Thermal Zone Valve, four-wire (A3010526).

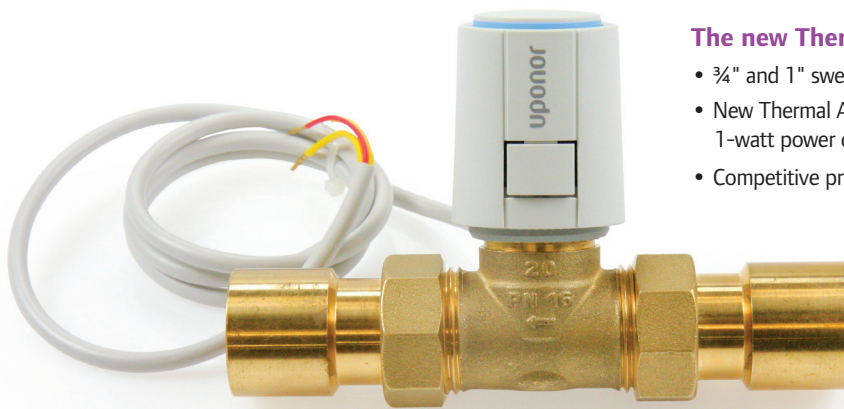

The new Thermal Zone Valve (A3011075) includes:

- 3/4" and 1" sweat adapters
- New Thermal Actuator, four-wire (A3023522) with lower, 1-watt power consumption
- Competitive pricing

Frequently Asked Questions

Can I reverse the open/close operation of the valve?

No, the Thermal Zone Valve is powered open/de-energized closed. This function is not adjustable.

Can I use the Uponor Motorized Valve Actuator with this valve?

No, the Thermal Zone Valve is only compatible with the Uponor Thermal Actuator, four-wire (A3023522).

Why do I have flow through the valve when there is no call for heat?

The Uponor Thermal Actuator, four-wire (A3023522) is shipped partially open with the end switch closed. To close the actuator, apply power to the actuator for six (6) minutes, then remove power and allow it to fully close. (Refer to the Uponor Thermal Actuator Instruction Sheet for more details.)

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Tel: 800.321.4739
Fax: 952.891.2008

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Tel: 888.994.7726
Fax: 800.638.9517

www.uponorpro.com