

2" Copper Valveless Manifold

Submittal information
Revision B: May 3, 2019

Project information

Job name:

Location:

Part no. ordered:

Engineer:

Date submitted:

Contractor:


Submitted by:

Manufacturer's representative:

Approved by:

Technical data

Material:	Type L copper
Maximum temperature (no pressure):	320°F (160°C)
Maximum working temperature/pressure:	210°F (99°C) at 150 psi
Maximum flow rate:	45 gpm

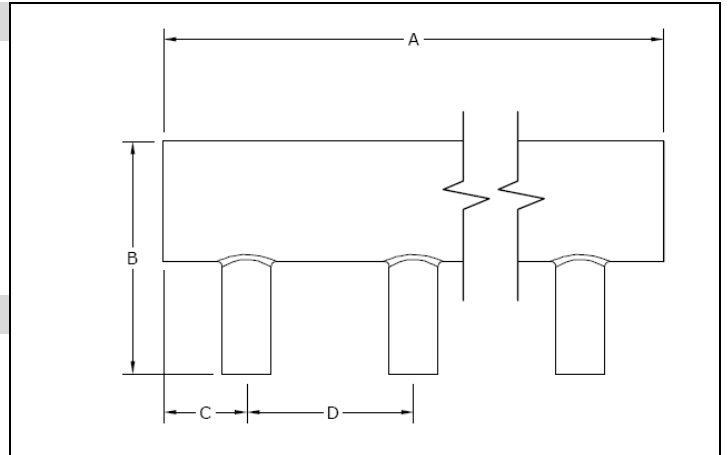

Product information and application use

Use the Uponor 2" Copper Valveless Manifold in hot and cold domestic potable water distribution systems or balanced radiant heating and/or cooling systems that do not require individual loop control. The manifold features 3/4" sweat connections.

✓ Description	Part Number	A	B	C	D	Weight
2" x 6' Copper Manifold with 24 outlets, 3/4" sweat	F2802075	72.00"	4.13"	1.50"	3.00"	12.35 lbs.

Installation

Use any product designed to mount 2" copper pipe as a mounting bracket. Any bend within 6 inches of the connection to the manifold requires the use of a tube talon (F7050750) or bend supports (A5110750 or A5150750).

Standards

CAN/CSA B137.5; ASTM F877

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

IAPMO; ANSI/NSF 14- and 61-certified

Related applications

PEX-a plumbing systems
Radiant heating and cooling systems

Contact information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
uponorpro.com

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
uponorpro.com