

# Commercial Engineered Polymer (EP) Flow-through Multi-port Tee


Submittal Information  
Revision D: Feb. 1, 2016

## Project Information

|                                |                   |
|--------------------------------|-------------------|
| Job Name:                      |                   |
| Location:                      | Part No. Ordered: |
| Engineer:                      | Date Submitted:   |
| Contractor:                    | Submitted By:     |
| Manufacturer's Representative: | Approved By:      |

## Technical Data

|                                       |   |
|---------------------------------------|---|
| Material:                             |   |
| 1 1/4" Tee:                           | Modified Polyphenylsulfone              |
| 2" Tee:                               | Polyphenylsulfone                       |
| Maximum Temperature (no pressure):    | 320°F (160°C)                           |
| Maximum Working Temperature/Pressure: | 210°F (99°C) at 150 psi                 |
| Maximum Flow for 3/4" Outlet:         | 8.8 gpm at 8 fps<br>13.2 gpm at 12 fps  |
| Maximum Flow for 1" Outlet:           | 14.5 gpm at 8 fps<br>21.8 gpm at 12 fps |
| Maximum Flow for 1 1/4" Inlet:        | 21.7 gpm at 8 fps<br>32.6 gpm at 12 fps |
| Maximum Flow for 2" Inlet:            | 51.9 gpm at 8 fps<br>77.9 gpm at 12 fps |

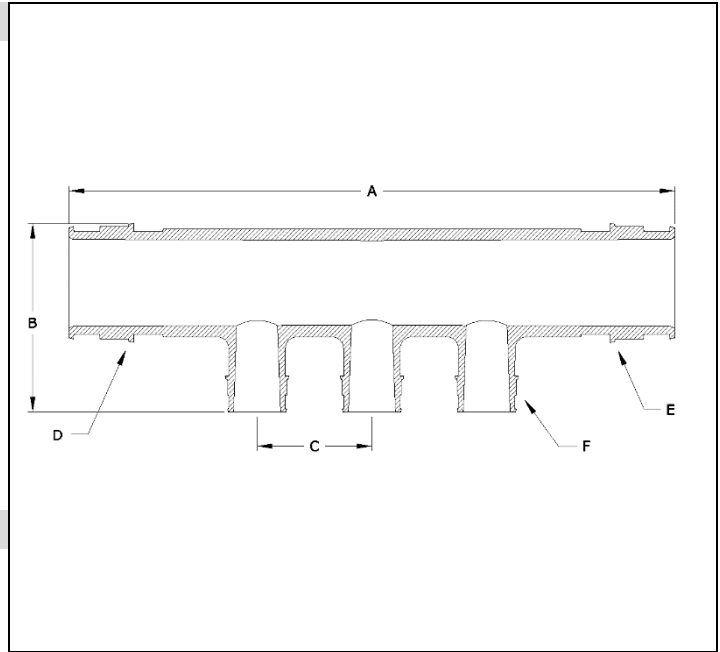

## Product Information and Application Use

Commercial EP Flow-through Multi-port Tee features 1 1/4" or 2" ProPEX® inlets with 3/4" or 1" ProPEX branch outlets for use with crosslinked polyethylene (PEX) piping.<sup>1</sup> The tee is made of engineered polymer (EP), a high-performance material used in demanding, hot-water applications.

| ✓ Description  | Part Number | A     | B    | C     | D             | E             | F           | Weight    |
|--|-------------|-------|------|-------|---------------|---------------|-------------|-----------|
| EP Flow-through Multi-port Tee, 3 (3/4") outlets, 1 1/4" x 1 1/4" ProPEX | Q2231373    | 8.2"  | 2.3" | 1.75" | 1 1/4" ProPEX | 1 1/4" ProPEX | 3/4" ProPEX | 0.22 lbs. |
| EP Flow-through Multi-port Tee, 3 (1") outlets, 2" x 2" ProPEX           | Q2232102    | 10.6" | 3.3" | 2"    | 2" ProPEX     | 2" ProPEX     | 1" ProPEX   | 0.55 lbs. |

## Installation

Properly mount the multi-port tee by securing all adjoining PEX pipes to the framing or support structure within 6" of each ProPEX connection. For more information, refer to the Uponor Professional Plumbing Installation Guide.

## Standards

ANSI/NSF 14 and 61; CAN/CSA B137.5; ASTM F877; ASTM F1960

## Codes

IPC; UPC; NSPC; NPC of Canada

## Listings

ICC ESR 1099; IAPMO 3946; HUD MR 1269, cQAIus P321

## Related Applications

PEX-a Plumbing Systems

## Contact Information

Uponor, Inc.  
5925 148<sup>th</sup> Street West  
Apple Valley, MN 55124 USA  
Phone: 800.321.4739  
Fax: 952.891.2008  
www.uponorpro.com

Uponor Ltd.  
2000 Argentia Rd., Plaza 1, Ste. 200  
Mississauga, ON L5N 1W1 CANADA  
Phone: 888.994.7726  
Fax: 800.638.9517  
www.uponorpro.com

<sup>1</sup>ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.