

Engineered Polymer (EP) Flow-through Multi-port Horizontal Tee

Submittal Information

Revision D: Feb. 2, 2016

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

| | |
|---|--|
| Material: | Polysulfone GF120 |
| Maximum Temperature (no pressure): | 320°F (160°C) |
| Maximum Working Temperature/Pressure: | 210°F at 150 psi (99°C at 10.3 bar) |
| Maximum Multi-port Tee Flow for 3/4" Inlet: | 13.2 gpm at 12 fps 8.8 gpm at 9 fps |

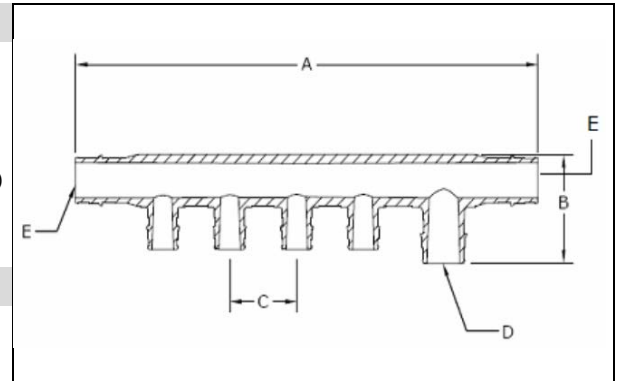

Product Information and Application Use

Engineered Polymer (EP) Flow-through Multi-port Horizontal Tee is used in hot and cold domestic potable water distribution systems. This tee features 3/4" ProPEX® inlets with 1/2" ProPEX outlets.¹

| ✓ Description | Part Number | A | B | C | D | E | Weight |
|---|-------------|-------|-------|-------|--------------|--------------|-----------|
| EP Flow-through Multi-port Horizontal Tee, 4 outlets, 3/4" x 3/4" x 3/4" ProPEX | Q2247577 | 8.66" | 1.87" | 1.25" | 0.75" ProPEX | 0.75" ProPEX | 0.12 lbs. |

Installation

Use any product designed to mount 1" copper pipe as a mounting bracket. For more information, refer to the Uponor AquaPEX® Professional Plumbing Installation Guide.

Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

ANSI/NSF 14- and 61-certified; ICC ESR 1099; IAPMO 3946; cQAIus P321

Related Applications

PEX-a Plumbing Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
www.uponorpro.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
www.uponorpro.com

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.