

## Engineered Polymer (EP) Flow-through Vertical Multi-port Tee

Submittal information  
Revision F: July 29, 2019

### Project information


Job name:	
Location:	Part no. ordered:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

### Technical data

Material:	Engineered polymer (EP)
Maximum temperature (no pressure):	320°F (160°C)
Maximum working temperature/pressure:	210°F at 150 psi (99°C at 10.3 bar)
Maximum multi-port tee flow for ¾" inlet:	13.2 gpm at 12 fps; 8.8 gpm at 8 fps

### Product information and application use

Engineered polymer (EP) flow-through vertical multi-port tees are designed for use in hot and cold domestic potable water distribution systems. The tee features ¾" ProPEX® inlets and ½" ProPEX outlets.<sup>1</sup>

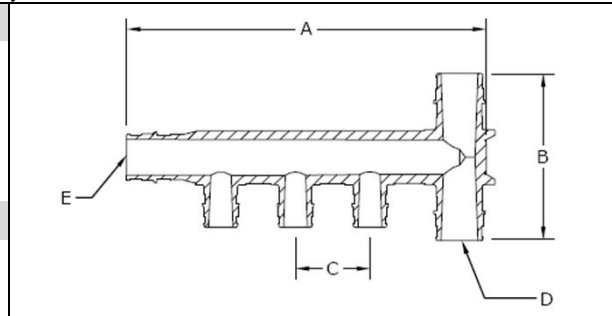

✓ Description	Part number	A	B	C	D	E	Weight
EP Flow-through Multi-port Vertical Tee, 3 outlets, ¾" x ¾" x ¾" ProPEX	Q2237757	6.03"	2.85"	1.25"	0.75" ProPEX	0.75" ProPEX	0.12 lbs.
EP Flow-through Multi-port Vertical Tee, 4 outlets, ¾" x ¾" x ¾" ProPEX	Q2247757	7.28"	2.85"	1.25"	0.75" ProPEX	0.75" ProPEX	0.16 lbs.

### Installation

Use any product designed to mount 1" copper pipe as a mounting bracket. For more information, refer to the Uponor Piping Systems Installation Guide.

### Standards

ASTM E84; ASTM E119; ASTM E814; ASTM F877; ASTM F1960; CAN/CSA B137.5; NSF 14; NSF 61

### Codes

IBC; IMC; IPC; IRC; NPC of Canada; NSPC; UMC; UPC

### Listings

cNSFus-pw; cQAlus P321; HUD MR 1269; ICC-ES-PMG-1006; ICC-ES-PMG-1012; U.P. Code

### Related applications

PEX-a plumbing systems

### Contact information

Uponor Inc.  
5925 148<sup>th</sup> Street West  
Apple Valley, MN 55124 USA  
Phone: 800.321.4739  
Fax: 952.891.1409  
uponorpro.com

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4 CANADA  
Phone: 888.994.7726  
Fax: 800.638.9517  
uponorpro.com

<sup>1</sup>ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.