

ProPEX® Lead-free (LF) Brass Ball Valve, 1/2" PEX x 1/2" MIP

Submittal information

Revision C: Feb. 18, 2020

Project information

Job name:

Location:

Part no. ordered:

Engineer:

Date submitted:

Contractor:

Submitted by:

Manufacturer's representative:


Approved by:

Technical data

Material:	Brass
Maximum temperature (no pressure):	250°F (121°C)
Maximum working pressure:	250 psi

Product information and application use

ProPEX® lead-free ball valves feature a shut-off valve between 1/2" Uponor AquaPEX® pipe and 1/2" male iron pipe (MIP).¹ These valves are not compatible with applications using glycol.

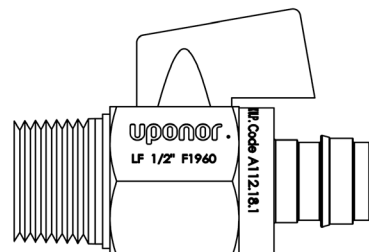

✓ Description	Part number	Length	Height	Width	Cv	Weight
ProPEX LF Brass Ball Valve, 1/2" PEX x 1/2" MIP	LF4795050	2.459"	1.656"	1.155"	3.44	0.20 lbs.

Installation

Install valve according to local building code. Do not dismantle. If soldering, aim flame away from fitting. For more information, refer to the Uponor Piping Systems Installation Guide.

Standards

CSA 137.5 and B125; ASTM F877; ASTM F1960; ASME A112.18.1

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

ANSI/NSF 14- and 61-certified; U.P. Code, Annex G

Related applications

PEX-a plumbing systems

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
uponorpro.com

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
uponorpro.com

¹ProPEX® is a registered trademark of Uponor Inc. ProPEX™ is a trademark of Uponor Ltd.