

TruFLOW™ Jr. Manifold with Balancing Valves

Submittal information
Revision C: Oct. 18, 2018

Project information

Job name:

Location:

Engineer:

Contractor:

Manufacturer's representative:

Part no. ordered:


Date submitted:

Submitted by:

Approved by:

Technical data

Material:	UNS C3850 brass
Manifold size:	1"
Loop Cv (valve wide open):	1.9
Manifold body threaded connections:	R32
Manifold loop threaded connections:	R20
Maximum working pressure:	145 psi
Maximum fluid temperature:	220°F (104°C)
Maximum fluid flow rate:	14.0 gpm

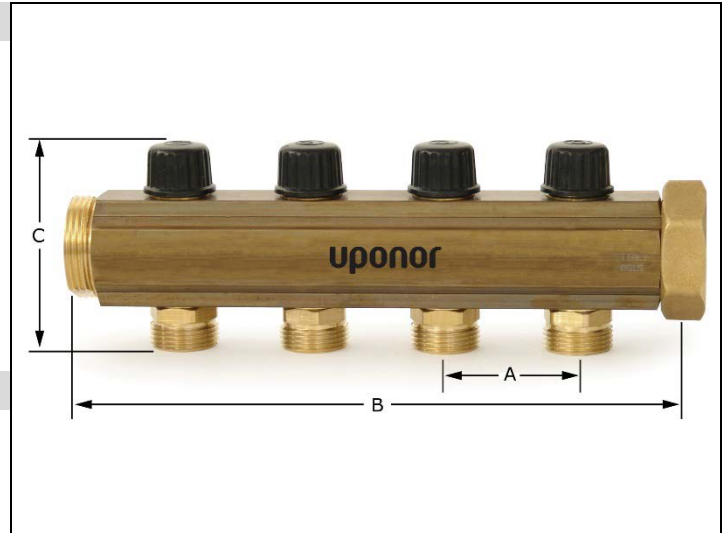

Product information and application use

Use the TruFLOW™ Jr. Manifold with Balancing Valves in conjunction with the TruFLOW Jr. Manifold with Isolation Valves or the TruFLOW Jr. Valveless Manifold to complete the manifold set. The TruFLOW Jr. Manifold with Balancing Valves allows manual flow balancing of the individual loops on the manifold.

✓ Description	Part number	A	B	C	Weight
TruFLOW Jr. Balancing Valves, 2-loop	A2663212	1.97"	5.66"	3.07"	2.40 lbs.
TruFLOW Jr. Balancing Valves, 3-loop	A2663213	1.97"	7.63"	3.07"	3.20 lbs.
TruFLOW Jr. Balancing Valves, 4-loop	A2663214	1.97"	9.60"	3.07"	3.90 lbs.

Installation

For more information, refer to the Uponor TruFLOW Jr. Manifold Instruction Sheet or the Uponor Complete Design Assistance Manual. Accessories: TruFLOW Jr. Manifold Bracket: A2640021; End Cap with Vent: A2803250; Basic End Cap: A2080032.

Standards

ASTM F877; R32: ISO 228-G 1¼; R20: SO 228-G ¾ B

Codes

N/A

Listings

NSF-rfh

Related applications

Radiant heating and cooling systems
Snow and ice melting systems
Permafrost prevention systems
Turf conditioning systems

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
uponorpro.com

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
uponorpro.com