

Uponor Manifolds for Radiant Heating and Cooling Systems




TruFLOW™ Manifold Highest Quality, Versatile Manifold

- 1" and 1¼" manifold offering
- High-quality brass construction
- Commercial or residential applications
- Only manifold in the industry listed to NSF-rfh
- Maximum operating condition 194°F (90°C) at 145 psi
- Integrated balancing and isolation valves
- Compatible with all glycols used in radiant heating/cooling systems
- Optional high-temperature, pressure-glass flow meters
- Modular design (ball valves, barrel length, fittings)



Engineered Polymer (EP) Manifold Modular, Sweat-resistant EP Materials

- 1" manifold offering
- Durable, cost-effective EP materials
- Commercial or residential applications
- Temperature/pressure rating of 140°F (60°C) at 87 psi, 176°F (80°C) at 58 psi and 194°F (90°C) at 44 psi
- Integrated balancing and isolation valves with flow meters and temperature gauges
- Compatible with propylene glycol only
- Modular design (ball valve, barrel length)
- EP material helps prevent condensation in cooling applications

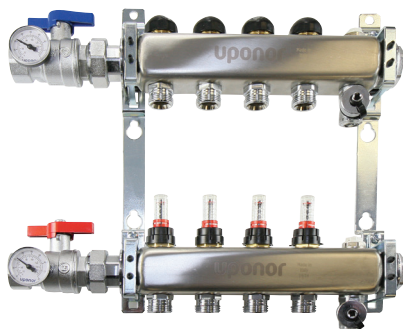

Stainless-steel Manifold Cost-effective, Pre-assembled Metal Alternative

- 1" and 1¼" manifold offering
- Commercial or residential applications
- Temperature/pressure rating of 68°F (20°C) at 145 psi, 158°F (70°C) at 87 psi and 194°F (90°C) at 44 psi
- Integrated balancing and isolation valves with flow meters, ball valves and temperature gauges
- Pre-assembled and ready to install right out of the box
- NPT-threaded ball valve for easy, cost-effective transition
- Compatible with all glycols used in radiant heating/cooling systems

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Tel: 800.321.4739
Fax: 952.891.2008

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Tel: 888.994.7726
Fax: 800.638.9517