

ProPEX® Lead-free (LF) Copper Straight Stub Transition Fitting

Submittal Information
Revision A: Oct. 23, 2015

Project Information


Job Name:	
Location:	Part No. Ordered:
Engineer:	Date Submitted:
Contractor:	Submitted By:
Manufacturer's Representative:	Approved By:

Technical Data

Material: C63900 Brass and Type L-Copper Tube

Product Information and Application Use

ProPEX® Lead-free (LF) Copper Straight Stub transitions Uponor PEX tubing to copper pipe for use in hot and cold domestic potable water systems and hydronic radiant heating and cooling systems.¹ The transition fitting can be used for direct transition to copper sweat, copper press and roll-groove applications. The transition fitting is safe for direct burial in soil.

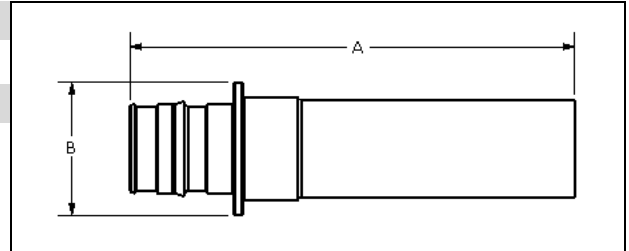

✓ Description	Part Number	A	B	Weight
ProPEX LF Copper Straight Stub, 2½" PEX LF Brass x 2½" Copper	LF2962525	12.1"	3.6"	3.7 lbs.
ProPEX LF Copper Straight Stub, 3" PEX LF Brass x 3" Copper	LF2963030	13.7"	4.2"	5.5 lbs.

Installation

Use the appropriate Uponor ProPEX Ring for the tubing (sold separately). Do not solder within 18 inches of the ProPEX fitting. Refer to the Uponor AquaPEX® Professional Plumbing Installation Guide or Uponor Hydronic Piping Design Assistance Manual for additional information.

Standards

ASTM F1960; CAN/CSA B137.5; NSF 14; NSF 61; NSF 372

Codes

IBC; IMC; IPC; IRC; NPC of Canada; NSPC; UMC; UPC

Listings

cNSFus-pw-G; cNSFus-rfh; ICC-ES-PMG-1006; ICC-ES-PMG-1012

Related Applications

PEX-a Plumbing Systems
Hydronic Radiant Heating and Cooling Systems
Snow Melting Systems
Turf Conditioning Systems
Permafrost Prevention Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
www.uponorpro.com

Uponor Ltd.
2000 Argentia Road, Plaza 1, Suite 200
Mississauga, ON L5N 1W1 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
www.uponorpro.com

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.