

Basic End Cap/Brass Manifold Loop End Cap

Submittal information
Revision C: Feb. 3, 2020

Project information

Job name:

Location:

Part no. ordered:

Engineer:

Date submitted:

Contractor:


Submitted by:

Manufacturer's representative:

Approved by:

Technical data

Material: Brass
Gasket: EPDM, peroxide cured, durometer 80
Maximum pressure: 125 psi
Maximum temperature: 220°F (104°C)

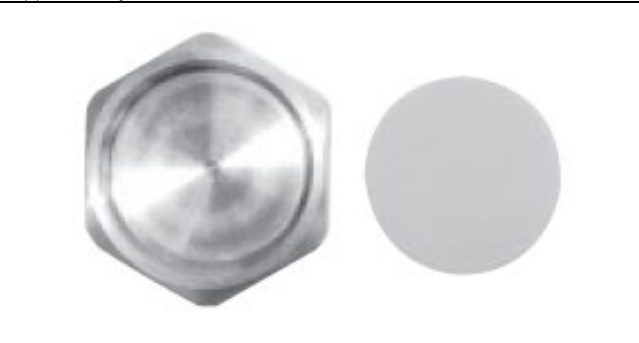

Product information and application use

The Basic End Cap terminates the end of the TruFLOW™ Jr. modular manifolds. Includes required gaskets and O-rings.

The Brass Manifold Loop End Cap closes off unused QS20 loop connections.

✓ Description	Part number	Length	Height	Depth	Weight
Basic End Cap, R32	A2080032	2.13"	2.13"	0.625"	0.25 lbs.
Brass Manifold Loop End Cap	A2080020	1.30"	1.30"	0.500"	0.10 lbs.
Basic End Cap Gasket, spare part, R32	A2400032	1.58"	1.58"	0.125"	0.008 lbs.
Brass Manifold Loop End Cap Gasket, spare part	A2400020	0.94"	0.94"	0.100"	0.002 lbs.

Installation

The Basic End Cap threads onto one end of a brass manifold. A gasket aids the seal. Do not over-tighten. The Brass Manifold Loop End Cap threads onto a brass manifold outlet. A gasket aids the seal. Do not over-tighten. For more information, refer to the Uponor Radiant Installation Handbook. Available accessories: Basic End Cap Gasket, spare part (A2400032); Loop End Gasket, spare part (A2400020).

Standards

ISO 228-G ¼" BSP; ISO 228-G 1¼" BSP

Codes

UMC; IMC; IRC; NPC of Canada

Listings

N/A

Related applications

Radiant heating and cooling systems

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
uponorpro.com

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
uponorpro.com